



**INCOMPARABLY
FAST AND SAFE**

SCI[®]MAT


Standard EN 1870-6 : 2017

- ♦ Emergency stop lever for PTO drive
- ♦ Cutting length from 20 to 50 cm
- ♦ Safety cover on log carriage
- ♦ Log grip system while sawing
- ♦ Adjustable conveyor speed
- ♦ Power supply : PTO tractor
- ♦ TCT blade of high quality

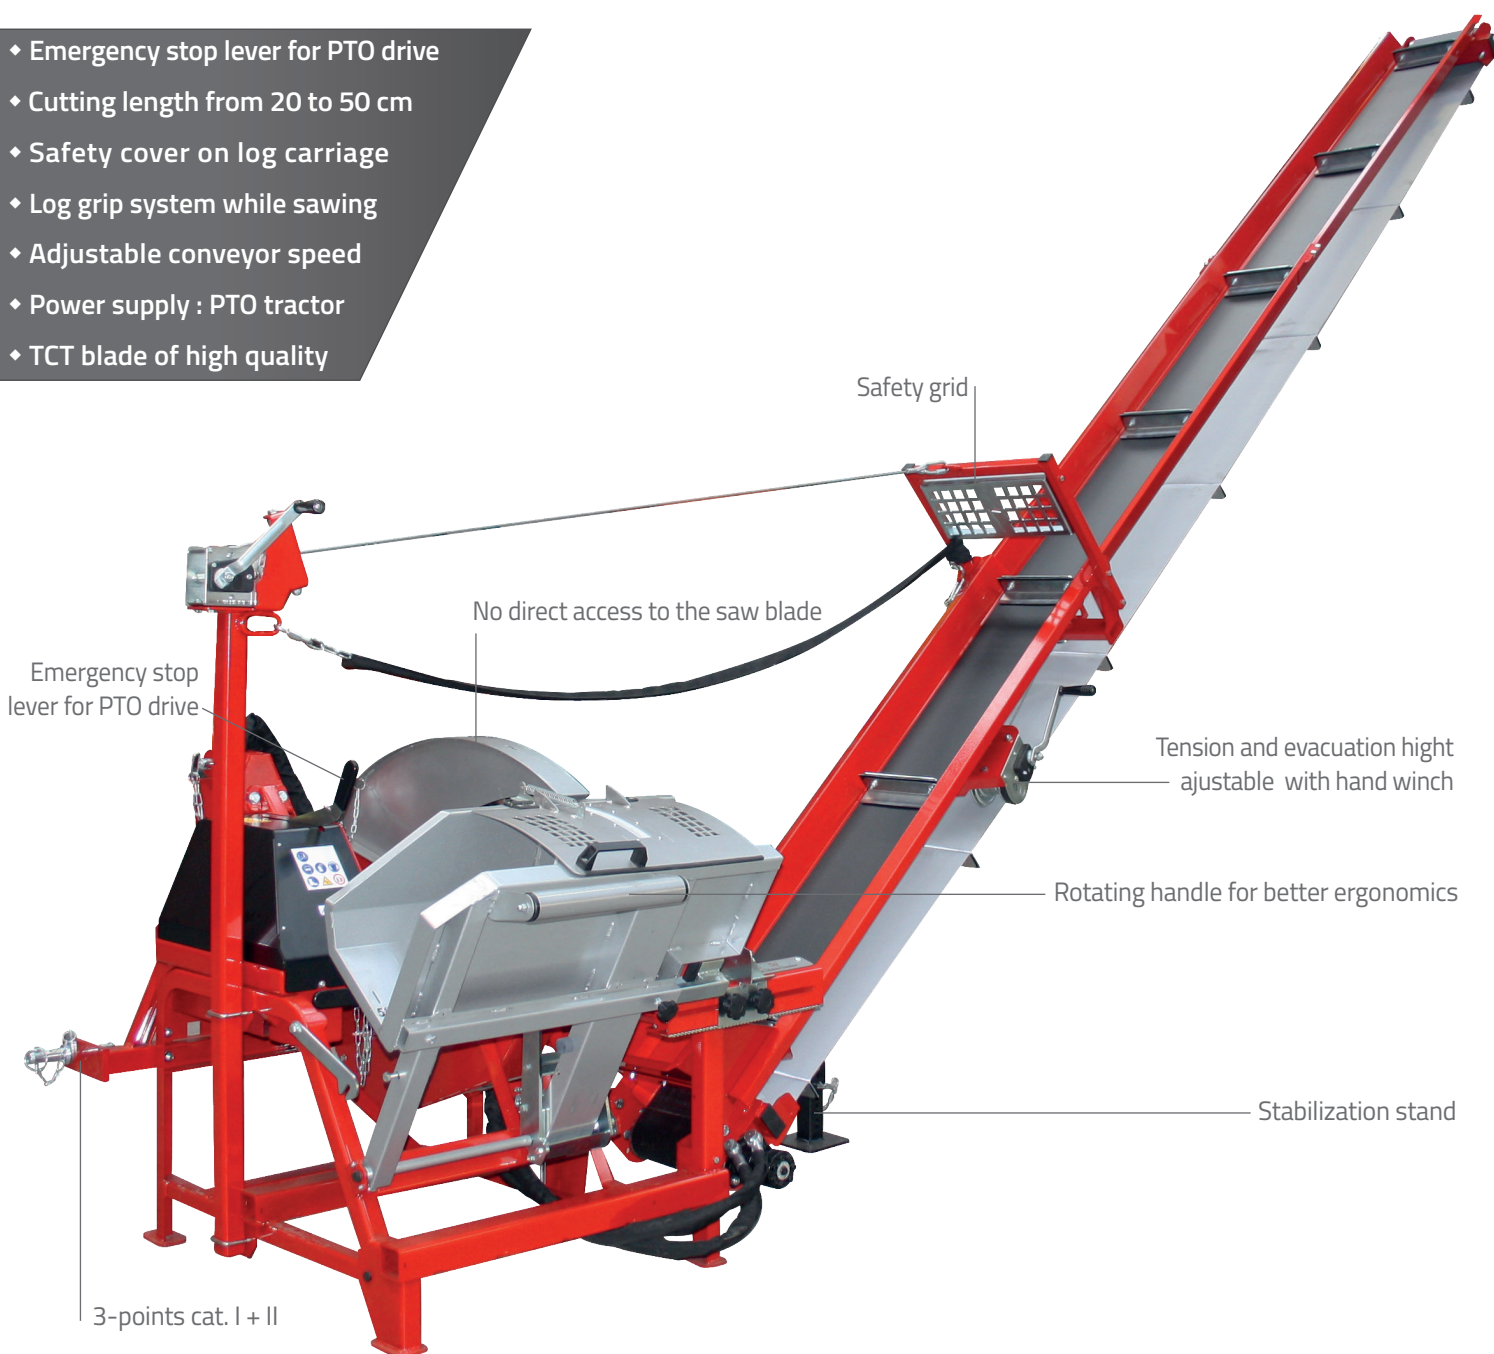

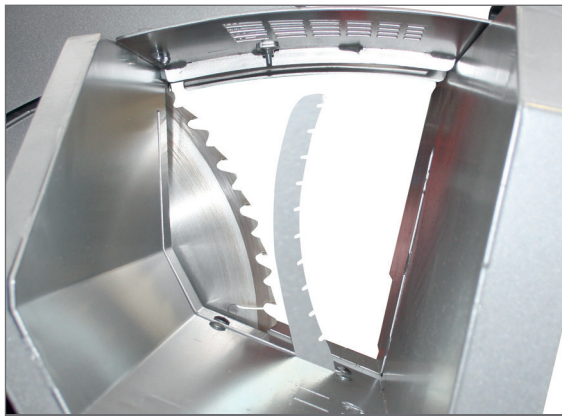

Log grip system while sawing

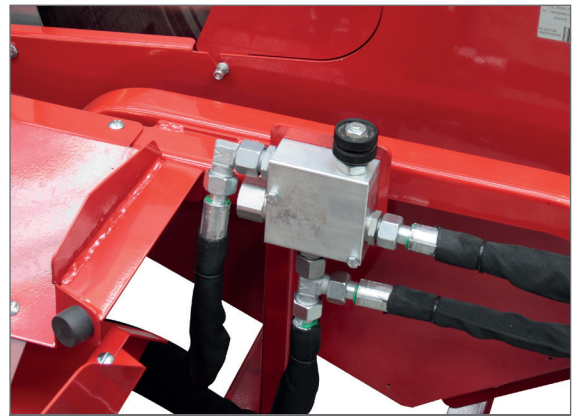

Adjustable conveyor speed



Cutting length from 20 to 50 cm



Safety cover over log carriage

Sciomat	WSA-H with conveyor	WSA-P with conveyor
Power supply	PTO tractor + Tractor hydraulic	PTO tractor and hydraulic power unit
TCT blade Ø 700mm	Standard	
Ø Minimal / Maximal Ø round, (mm)	40 - 240 or splitted log	
Dimension of transport (HxLxW) (cm)	240 x 140 x 120	
Conveyor : loading length (m)	5	
Conveyor : loading height (m)	3	
Weight (kg)	365	385
TCT blade Ø 700/30mm (LAM00011)		
PTO shaft Type 3 (CAR00001A)		
Tilting extension		