


STEELTHICKNESS 5 mm

■ Tilting universal bucket


Universal bucket on 3-point hitch tractor, with a tilting system for easy use. Wide opening angle in tilted position.

- Mechanical or hydraulic tilting
- High quality dumpster in 5mm thick sheet
- Optional side rail
- Cat. I and II
- Maximal loading : 900 kg

> *Tractor with double effect valve required for hydraulic model*

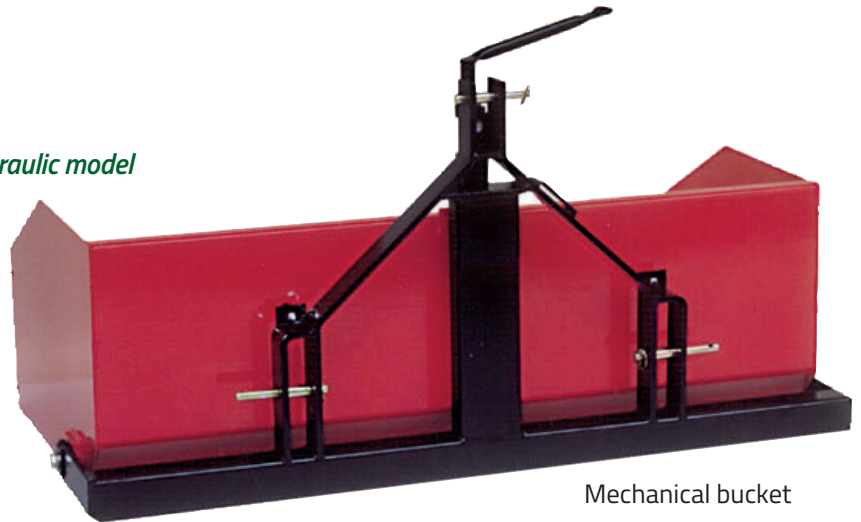

Mechanical bucket

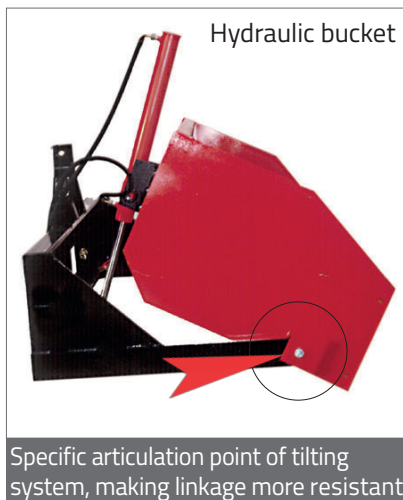

Hydraulic bucket

Specific articulation point of tilting system, making linkage more resistant



Back rail (Option)



Optimal tilting angle

Mechanical bucket	B100	B125	B150	B175	B200	B225
Hydraulic bucket	B100	B125	B150	B175	B200	B225
Width (cm)	100	125	150	175	200	225
Dimension (LxWxH)(cm)	100x90x60	125x90x60	150x90x60	175x90x60	200x90x60	225x90x60
Max. capacity (m ³)	0,5	0,6	0,7	0,9	1	1,1
Max. loading (kg)	400	496	603	704	800	904
Weight (kg)	165	180	200	225	240	255
Option back rail	RID100000	RID125000	RID150000	RID175000	RID200000	RID225000
Hardox blade (price per meter)						