

HANDLING RANGE



■ Hydraulic skidding grapple

The skidding grapple is made for lifting and moving timber quickly and easily.

With the toothed bar on the 3-point hitch, the clamp can move and maintain properly entire timbers, or even much shorter.

The big advantage is that it requires only a low tractor power and does not need to get off the tractor to handle.

RZ 110 model

- Recommended for tractor until 30 HP
- Double acting cylinder
- Rotating angle of 80° (left and right)
- Good tensioning capacity
- Easy adaptation on the tractor 3 point hitch
- Cat. I

> *Tractor with double effect valve required*



RZ 165 model


The skidding grapple is made for lifting and moving one heavy timber, or several at the same time.

The clamping capacity is expected to provide a safe work especially when you move stacked wood or branches.

The notched arms have specific shape to prevent the wood from slipping.

- Recommended for tractor from 60 to 120 HP
- Double acting cylinder
- Rotating angle of 82° (left and right)
- Good tensioning capacity
- Easy adaptation on the tractor 3-point hitch
- Cat. II

> *Tractor with double effect valve required*

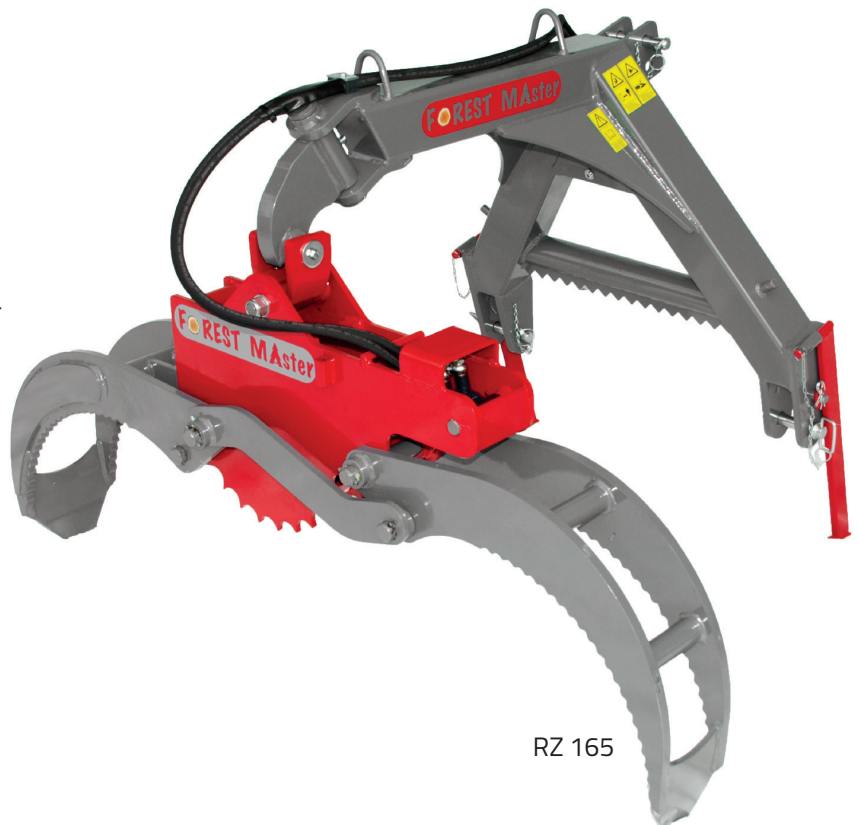

■ RZ165-R model

The skidding grapple rotator allows to manipulate logs with precision, even in a slope.

- Recommended for tractor from 60 to 120 HP
- Double acting cylinder
- Continuous rotation
- Good tensioning capacity
- Easy adaptation on the tractor 3 point hitch
- Cat. II

> *Tractor with double effect valve required*



Adaptor for front loader (euro)



RZ 165-R

Grapple	RZ 110	RZ 165	Grapple RZ 165-R 6 tons / with rotator 6 tons (Winch not included)
Tightening power (to)	6		9
Max. opening (cm)	110		170
Min. opening (cm)	6		11
Closed length (cm)	100		122
Ø max. of timber (cm)	45		70
Ø min. of timber (cm)	7		12
Max. pressure (bar)	180		180
Weight (kg)	140		295
Adaptor for euro front loader - (For the length of hydraulic hoses - contact us)			

■ RZ165-F Model

This new skidding grapple with radio remote control winch makes you reach even more easily timbers to move them.

Work quicker and safely.

- Recommended for tractor from 60 to 120 HP
- Double acting cylinder
- Rotating angle of 82 ° (left and right)
- Good tensioning capacity
- Easy adaptation on the tractor 3 point hitch
- Cat. II

> *Tractor with double effect valve required*

■ Winch radio remote controlled FW 1400-R

- Cable 35m / 6mm
- Works with radio remote control
- Hydraulic supply
- Traction power: 1400 kg

> *Tractor with single effect valve required*



RZ 165-F



Serial storage bar on all model RZ 165



Winch on RZ 165-F

Skidding RZ 165-F (With radio remote control winch FW 1400-R)

Tightening power (to)	9
Max. opening (cm)	170
Min. opening (cm)	11
Closed length (cm)	122
Ø max. of timber	70
Ø min. of timber	12
Max. pressure (bar)	180
Cable	6 mm / 35 m
Traction power (kg)	1400
Pull speed (m/s)	0,38
Weight (kg)	330

Winch radio remote controlled FW1400- R for adaptation on RZ 165 (No compatible avec RZ 165-R 6)

Adaptator for „euro“ front loader
(For the length of hydraulic hoses - contact us)